



TLF

MASS FLOW METERS

TLF SERIES *With or Without LCD Display*

±1% Accuracy

Linear Output

Thermal Technology

For Using in Non Corrosive gas

For Flow Rates up to 100 SLM

Power Supply Included

The NEW-FLOW Thermal Mass Flow Meters provide high performance. Thermal Technology offers advantages in accuracy, sensitivity and turn quality components and the latest technology are combined to provide reliable, compact meters and controllers. The TLF Series comes with or without an LCD display, and all models come with linear 0-5VDC and 4-20 mA output. The TLF Series measures the mass flow rate of gases in 23 ranges from 0-10 SCCM to 0-100 SLM as shown in the range table.

Technical Data

Wetted Material: Standard flowbody-SS316; Tapcon; option available.
O-ring-Viton

Output Signal: 0-5 VDC Linear min. load 1000Ω or 4-20 mA Linear, loop resistance 500Ω

Input Power: 24 VDC standard; optional power supply 15 VDC 115 VAC, 220 VAC @500mA

Accuracy: ±1% FS (including linearity)

Turn Down Ratio: 100:1

Repeatability: ±0.15% FS or better

Electric Connection: 9 Pin Sub "D"

Process Connection: 1/4" NPT female

Range: 0-10 SCCM to 0-100 SLM

Minimum Pressure: 40" H₂O

Max Pressure: SS316-500 psig; Tapcon-250 psig

Temperature Range: 0~50°C


Response Time: 1 Second

Temp. Coefficient: 0.05% Full Scale per 1°C or better

Pressure Coefficient: 0.01% Full Scale per PSIG or better

Weight: app. 1.08 kg with power supply

Display Digital Decimal Point Function



Range	Decimal Point
0 ~ 1.999	D3
2.00 ~ 19.99	D2
20.0 ~ 199.9	D1
200 ~ 1999	None

Range Table


Code	SCCM	Code	SLM	Code	SLM
00	0-10	06	0-1	14	0~35
01	0-20	07	0-2	15	0~40
02	0-50	08	0-5	16	0~45
03	0-100	09	0-10	17	0-50
04	0-200	10	0-15	18	0~55
05	0~500	11	0-20	19	0-60
		12	0-25	20	0-65
		13	0-30	21	0-70
				22	0-75
				23	0-100
				24	*Custom Flow Rate

Note. *Please notice that the max. flow rate is 100 SLM.



CE

Dimensions

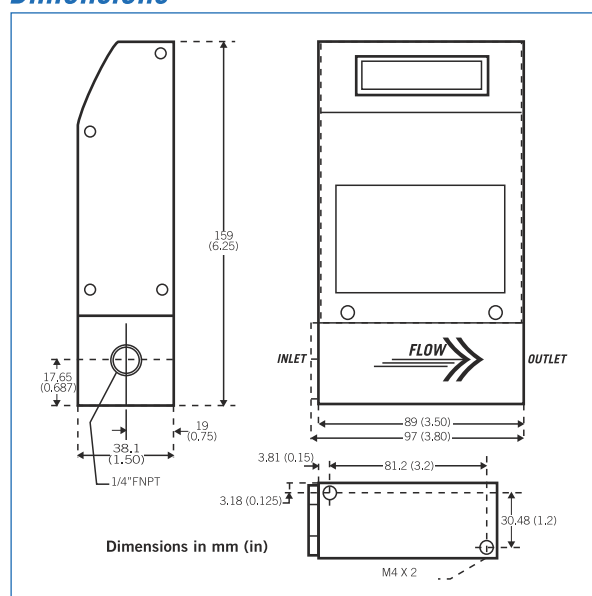

Ordering Information

TLF	Code	Flow Range
	00~23	Please refer to the measure range table.
	24	*Custom size (please directly fill in the requested range)
	Code	Wetted Material
		(A) SS316 (T) Tapcon (O) Option
	Code	Process Connection
	1	1/4" NPT (F)
	Code	Display
	W	With display
	O	Without display
	Code	Output Signal
		(1) 0-5VDC (2) 4-20 mA
	Code	Input Power
		(1) 24VDC (2) 15 VDC
	Code	Power Supply for 24 vdc
		(1) with
		(2) without
TLF		

FLOW